



City of Perth

Design and Construction Note

302.03

City Grey Paved Footpaths
Median and Kerb Cross-Section

Reviewed: 17/11/2021

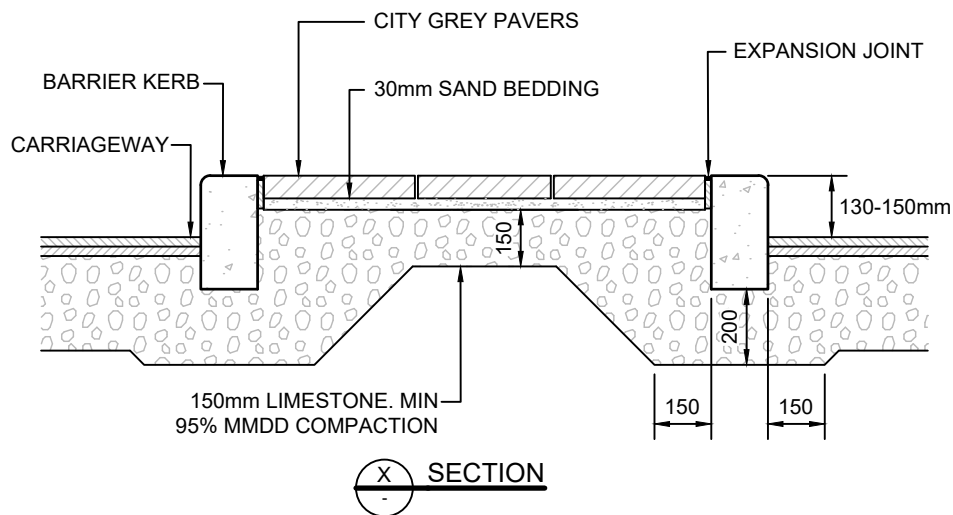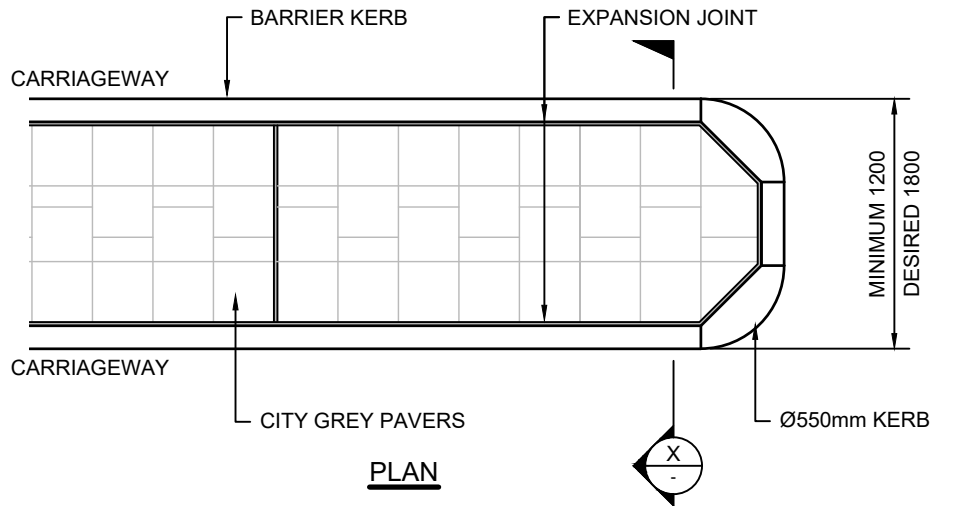

General Notes:

- The city grey paving used in footpaths, squares, medians and cross-overs etc. is an exposed aggregate concrete paving slab. Standard sizes supplied by 'Bonita Stone' (or approved similar) are:
 - 400x400x60mm, used for footpaths and pedestrian areas.
 - 300x200x70mm, used for cross-overs and trafficable areas.
- Leave joints of 3-4mm between the slabs and fill with 'Westbuild PaveN'lock' sand or similar approved.
- Provide expansion joints at the back of kerbs and at every 6 metres.
- All expansion joints shall be 75mm x 12mm 'Abelflex' or similar approved.
- Concrete pavers should be a minimum of 28 days old, prior to laying.
- 150mm minimum of compacted limestone, waterbound and placed on a compacted sub-grade, should be provided as base to all footpaths.