


NOTE WHERE DIMENSIONS BETWEEN TWO EXISTING DRIVEWAYS LESS THAN 2.4m PROVIDE ONE CROSS-OVER FOR BOTH.

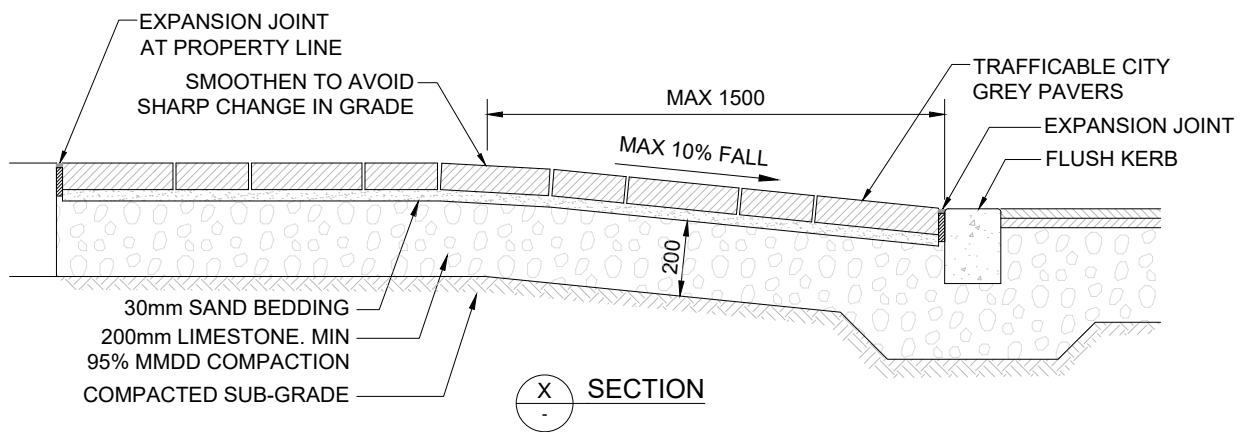

General Notes:

1. City Grey footpath pavers in trafficable areas are 'Bonita Stone' (or approved similar) 300x200x70mm.
2. Pavers are to be laid in herringbone pattern, at a 90° angle to the kerb.
3. Leave joints of 3-4mm between the slabs and fill with 'Westbuild PaveN'lock' sand or similar approved.
4. All expansion joints shall be 75mm x 12mm 'Abelflex' or similar approved with 'Westbuild PaveN'lock' sand or similar approved.
5. Concrete pavers should be a minimum of 28 days old, prior to laying.