


Design and Construction Note 301.03


City Grey Paved Footpaths

Concrete Vehicle Cross-Over

Reviewed: 17/11/2021

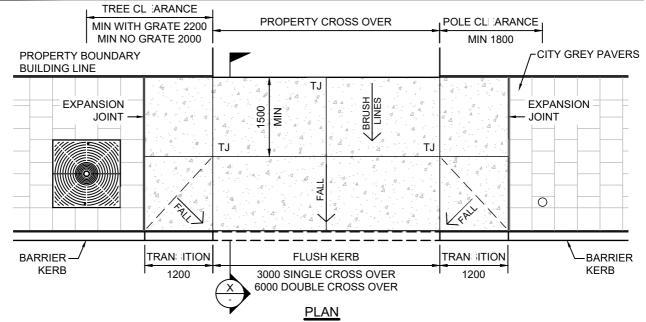

CONCRETE CROSSOVER IS ONLY FOR USE IN RESIDENTIAL AREAS IN CRAWLEY & UWA. USE IN THE CITY FOR SITE CONSTRUCTION PURPOSES IS TEMPORARY ONLY.

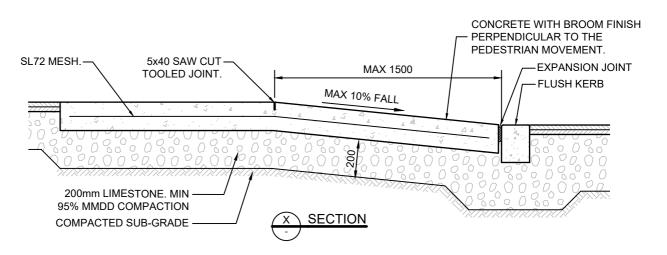

General Notes:

- 1. Contraction joints 5x40mm saw cuts fill with 'Westbuild PaveN'lock' sand or similar approved.
- 2. All expansion joints shall be 75mm x 12mm 'Abelflex' or similar approved with 'Westbuild PaveN'lock' sand or similar approved.
- 3. 150mm concrete to achieve a minimum 32 characteristic MPa compressive strength at 28 days. A minimum nominal aggregate of 14mm and slump of 80mm Max. Slip resistance to comply with AS4586 & AS3661.