


NOTE WHERE DIMENSIONS BETWEEN TWO EXISTING DRIVEWAYS LESS THAN 2.4m PROVIDE ONE CROSS-OVER FOR BOTH.

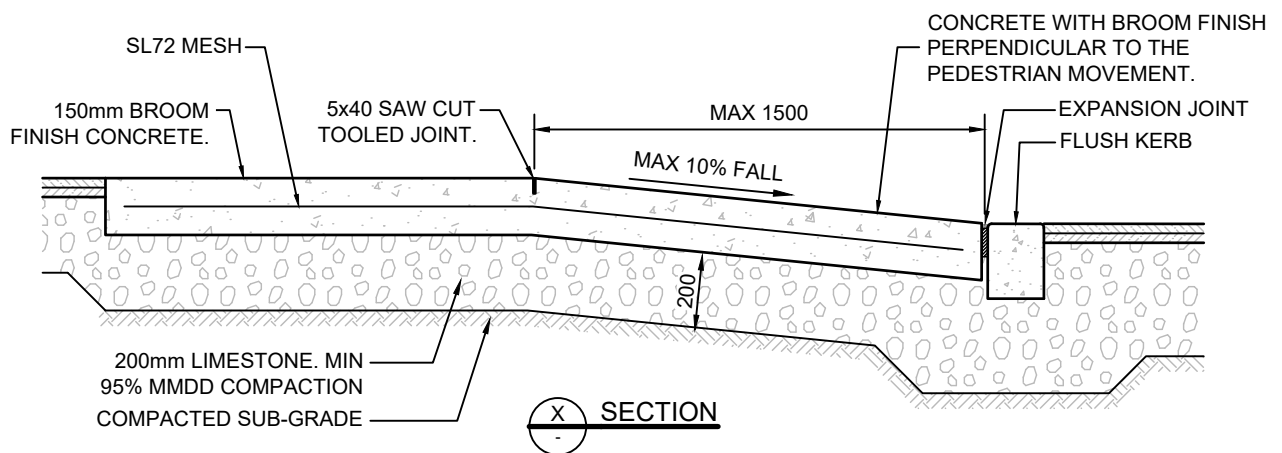

**General Notes:**

1. 150mm thick concrete to achieve a minimum 25 characteristic MPa compressive strength at 28 days. A minimum nominal aggregate of 14mm and slump of 80mm Max. Slip resistance to comply with AS4586 & AS3661. Broom finish perpendicular to the direction of pedestrian flow.
2. Saw Cut joints 5x40mm saw cuts fill with approved sealant to match surround colour.
3. All transverse expansion joints shall be "All-in One Lock" & Expansion Joint or equivalent at max spacing of 6m.
4. All longitudinal expansion joints shall be 75mm x 12mm 'Abelflex' or similar approved with 'Westbuild PaveN'lock' sand or similar approved.