


City of Perth

Design and Construction Note


501.02

Public Seating
Fixed Chair

Reviewed: 30/04/2019

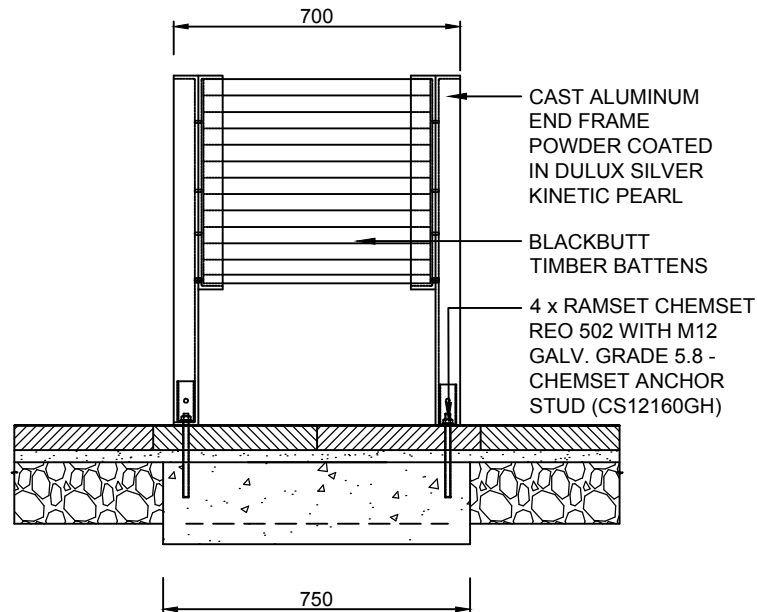

ELEVATION

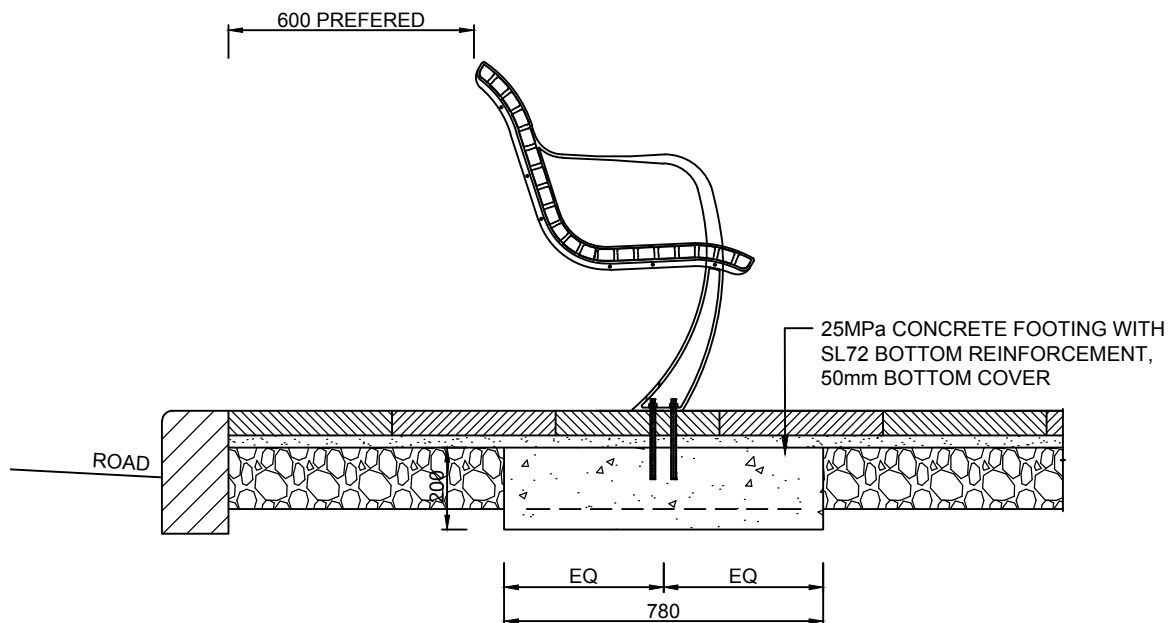

END ELEVATION

Seats should be located to ensure that the fixing down bolts are 50mm minimum from joints in the paving.

Seats should be positioned either parallel or at right angles to the street axis. In addition, seats should be located:

- * where they are needed;
- * where they do not become obstructive;
- * in the shade;
- * to create a sense of safety;
- * to provide a view towards activities; and
- * a minimum of 600mm from the road.