
STREET TREE HOME IN GRANITE PAVING WITH GRATE

STREET TREE AND IRRIGATION DESIGN

DRAWING NO

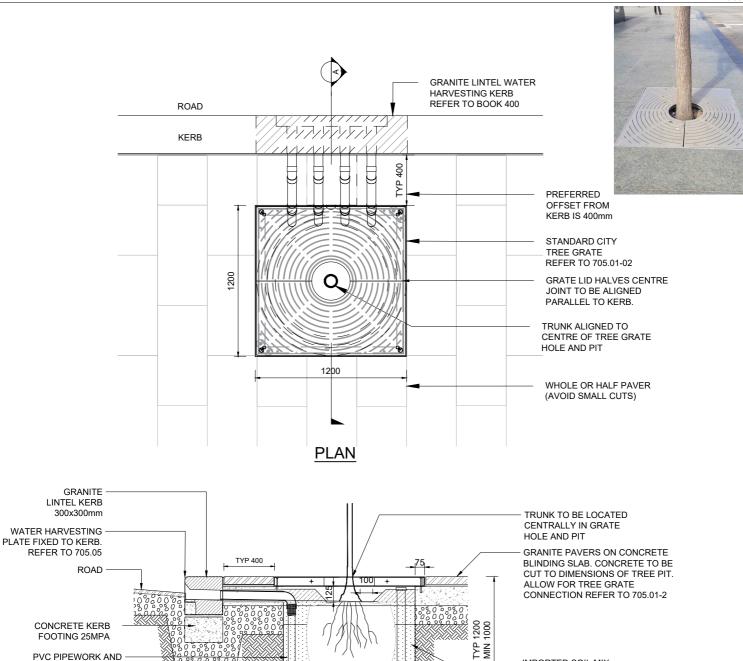

FOOTING 25MPA PVC PIPEWORK AND

CONNECTORS Ø65mm

WATERING RING. SLOTTED

EDGES OF EXCAVATION TYP 850mm BELOW FGL

AGRICULTURAL PIPE Ø100mm. WRAPPED IN GEOTEXTILE SLEEVE.

RING TO EXTEND TO HORIZONTAL

- TO BE READ IN CONJUNCTION WITH THE STREET TREE SPECIFICATION AND ALL OTHER DETAILS IN THIS BOOK 700.
- 2. PREFERRED ALIGNMENT IS 400mm BEHIND BACK OF KERB. ALTERNATIVE ALIGNMENTS CONSIDERED IN WIDE FOOTPATHS OR TO AVOID UNDERGROUND SERVICES. CITY REPRESENTATIVE TO APPROVE AND ALTERNATIVE ALIGNMENTS.

SECTION

1050

- TREE HOMES AND SOIL ZONES SHOULD NOT BE RESTRICTED TO THE SIZE SHOWN HERE.THE USE OF STRUCTURAL SOILS AND/OR CELLS IS REQUIRED TO IN ADDITION TO THIS DETAIL TO ACHIEVE TARGET SOIL VOLUMES. REFER TO 704.01-05
- TREES IN GRANITE PAVING AREAS ALWAYS REQUIRE TREE GRATES. NO MULCH FINISHES UNLESS OTHERWISE APPROVED BY CITY REPRESENTATIVE



DISCLAIMER:
THIS DOCUMENT HAS BEEN PREPARED BY THE CITY OF PERTH AND IS SUBJECT TO CHANGE. IT IS THE
RESPONSIBILITY OF THE USER TO ENSURE THAT THAT DESIGN AND CONSTRUCTION NOTE HAS NO FURTHER
REVISIONS BY CHECKING https://perth.wa.gov.au/en/building-and-planning/building-and-works/building-and-construction

IMPORTED SOIL MIX

COMPACTED BY HAND

AERATION AND FLUSHING

EXISTING SUBGRADE

Ø65mm RISER PVC PIPE FOR

DASH LINES INDICATE SOIL TO BE INSTALLED IN LAYERS AND LIGHTLY

A4